




UFO CEA

LED HIGH BAY

Davis' range of LED high bays continues to grow with the introduction of the CEA series, down-to-earth durable luminaires that pack a load of power into a small package. Light weight (down to as little as 2 kg!) and featuring outputs ranging from 100 W to 240 W, UFO CEA is available in a choice of beam angles, CCTs and CRIs. Mounting is achieved via eye bolt (supplied) and the IP65 rating ensures continued reliable operation in a variety of industrial environments. Eco-friendly and with surprisingly low energy consumption, these fittings require near zero maintenance and feature a fast turn-on for immediate action.

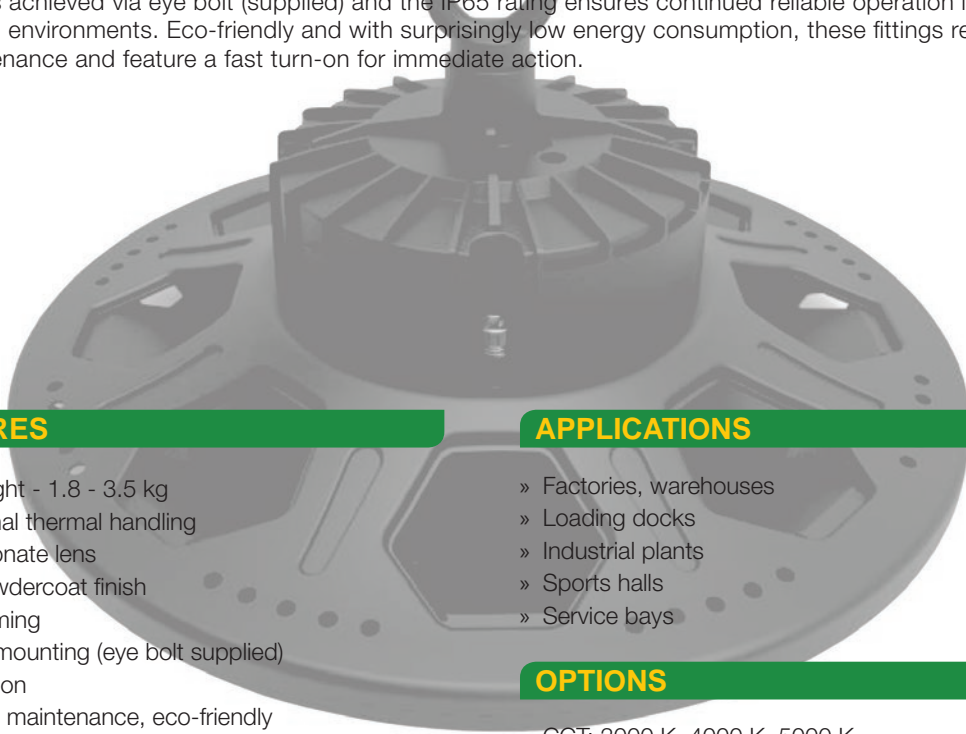

FEATURES

- » Light weight - 1.8 - 3.5 kg
- » Exceptional thermal handling
- » Polycarbonate lens
- » Black powdercoat finish
- » Non-dimming
- » Pendant mounting (eye bolt supplied)
- » Fast turn-on
- » Near zero maintenance, eco-friendly
- » IP65: luminaire, IP20: plug top only

APPLICATIONS

- » Factories, warehouses
- » Loading docks
- » Industrial plants
- » Sports halls
- » Service bays

OPTIONS




- » CCT: 3000 K, 4000 K, 5000 K
- » CRI: 70, 80
- » Beam angle 60°, 90°, 120°

SPECIFICATIONS

Model Number	UFO100CEA	UFO150CEA	UFO200CEA	UFO240CEA
Diameter (nom.)	290 mm	330 mm	390 mm	390 mm
Power (nom.)	100 W	150 W	200 W	240 W
Supply Voltage	220 - 240 VAC 50 / 60 Hz			
Lumen Output (± 5%)	14,100 lm	21,300 lm	27,100 lm	30,500 lm
Efficacy	139 lm / W	146 lm / W	139 lm / W	129 lm / W
CCT	3000 K / 4000 K / 5000 K			
Power Factor	0.98	0.99	0.96	0.96
CRI	70 / 80			
Beam Angle	60° / 90° / 120°			
LED L70	35,000 hr			
Ta (max.)	45° C			
Weight	1.8 kg	2.2 kg	2.85 kg	3.5 kg

LIGHTING DATA

UFO150CEA5K3B12

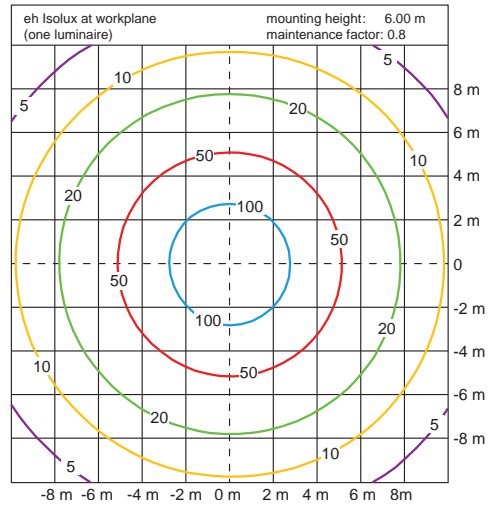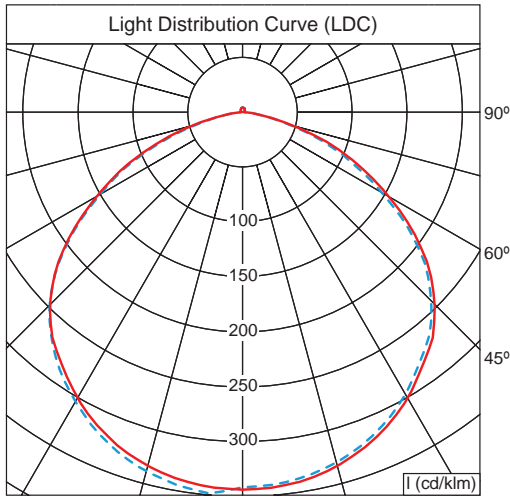


MODEL No. REFERENCE

Model	Power	Mounting	Colour Temp	Body Colour	Beam Angle	Connection
UFO	100 = 100 W	CEA = eye bolt	3K = 3000 K CRI = 80	3 = Black	B06 = 60°	A = no flex & plug
	150 = 150 W		4K = 4000 K CRI = 80		B09 = 90°	B = flex & plug
	200 = 200 W		5K = 5000 K CRI = 80		B12 = 120°	
	240 = 240 W		37 = 3000 K CRI = 70			
			47 = 4000 K CRI = 70			
			57 = 5000 K CRI = 70			

E.g. UFO150CEA4K3B09B = 150 W 4000 K black 90° c/w flex & plug

DIMENSIONS

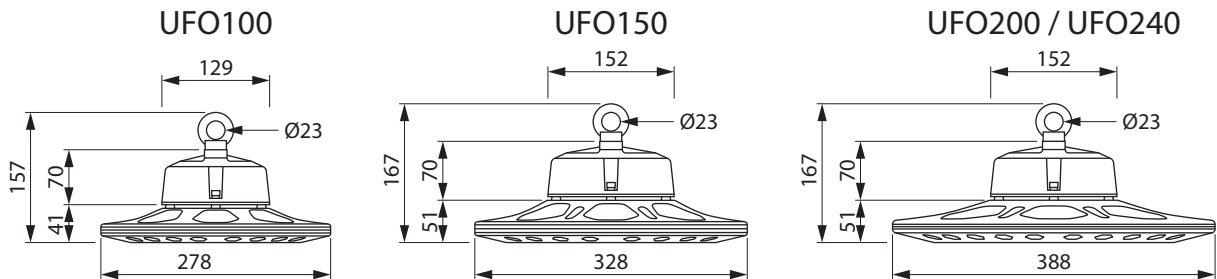

Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a competent person at all times. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

AUSTRALIA

HEAD OFFICE: Tel: +61 (7) 3712 8988 Fax: +61 (7) 3272 8988
 SALES OFFICES (all states): 1300 851 001

E-mail: australia@davislighting.com
 Website: www.davislighting.com