


PRODUCT FEATURES

- 1600 LUMENS COOL WHITE BEAM
- ADJUSTABLE TIME & LUX MANUAL
- OVER-RIDE WEATHERPROOF
- Easy installation, three years warranty

PACKAGING(ES-B06B)

- Packaging L180*W135*H175mm
- Carton 20pcs/CTN
- Carton Size L69.5*W38*H37cm


DIMENSIONS



Ambient Light	<10-2000LUX (adjustable)
Time-delay	min:10sec±3sec max:7min±2min
Detection Distance	2-12m (<24°C)(adjustable)
Rated Load	2x10W PAR30 LED(included) (Max. 2x150W PAR38 Lamps)
Installation Height	1.8m-2.5m
Working Humidity	<93%RH
Detection Motion Speed	0.6-1.5m/s

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Working Temperature	Detection Range	N.W	G.W
ES-B06B	220-240V	20W	1600lm	5000K	120°	>80	Black	-20~+40 C	180°	12.8Kg	14Kg

PHOTOMETRIC DATA

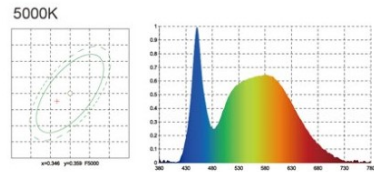

PRODUCT FEATURES

- CREE COB LED
- 2X15W 240VAC 50Hz
- Sensitivity adjustment: sensor with override function
- Setting time: 10±5 seconds to 4±1 minutes adjustable
- Colour available: black, silver, white and brushed chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4202	AC240V 50Hz	30W	2000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4202	AC240V 50Hz	30W	2080lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

PHOTOMETRIC DATA





PRODUCT FEATURES

- CREE COB LED
- 15W 240VAC 50Hz
- Sensitivity adjustment: sensor with override function
- Setting time: 10±5 seconds to 4±1 minutes adjustable
- Colour available: black, silver, white and brushed chrome

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4206	AC240V 50Hz	15W	1000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4206	AC240V 50Hz	15W	1040lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4205	AC240V 50Hz	30W	2000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4205	AC240V 50Hz	30W	2080lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
AC 4203	AC240V 50Hz	15W	1000lm	3000K	180°	>80	Black/Brushed Chrome/Silver/White
AC 4203	AC240V 50Hz	15W	1040lm	5000K	180°	>80	Black/Brushed Chrome/Silver/White



PRODUCT FEATURES

- Surface mounted
- 3 Wires
- Suitable with LED
- Manual override

MOTION SENSORS ST09 - Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST09	220V-240V	Max.1200W	180°	1.8m-2.5m	0.6-1.5m/s	12m MAX (<24°C)
• Time Delay	Min.10sec+ 3ec; Max.7min + 2min					
• Ambient Light	<3-2000LUX (adjustable)					

MOTION SENSORS ST765 - Microwave Sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST765	220V-240V	Max.1200W	180°	1.5-3.5m	0.6-1.5m/s	5-15m (adjustable)
• Time Delay	Min.10sec+ 3ec; Max.12min + 1min					
• Ambient Light	<3-2000LUX (adjustable)					
• Power Consumption	Approx.0.9W					

MOTION SENSORS ST05C - Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST05C	220V-240V	Max.1200W	360°	2.2m-4.0m	0.6-1.5m/s	6m MAX (<24°C)
• Time Delay	Min.10sec+ 3ec; Max.15min + 2min					
• Ambient Light	<3-2000LUX (adjustable)					

MOTION SENSORS ST41C - Infrared motion sensor

Model No.	Input	Rated Load	Detection range	Installation Height	Detection Motion Speed	Detection Distance
ST41C	220V-240V	Max.1200W	360°	2.2-4.0m	0.6-1.5m/s	6m MAX (<24°C)
• Time Delay	Min.10sec+ 3ec; Max.15min + 2min					
• Ambient Light	<3-2000LUX (adjustable)					