


# CARBON MONOXIDE ALARM

## BATTERY POWERED

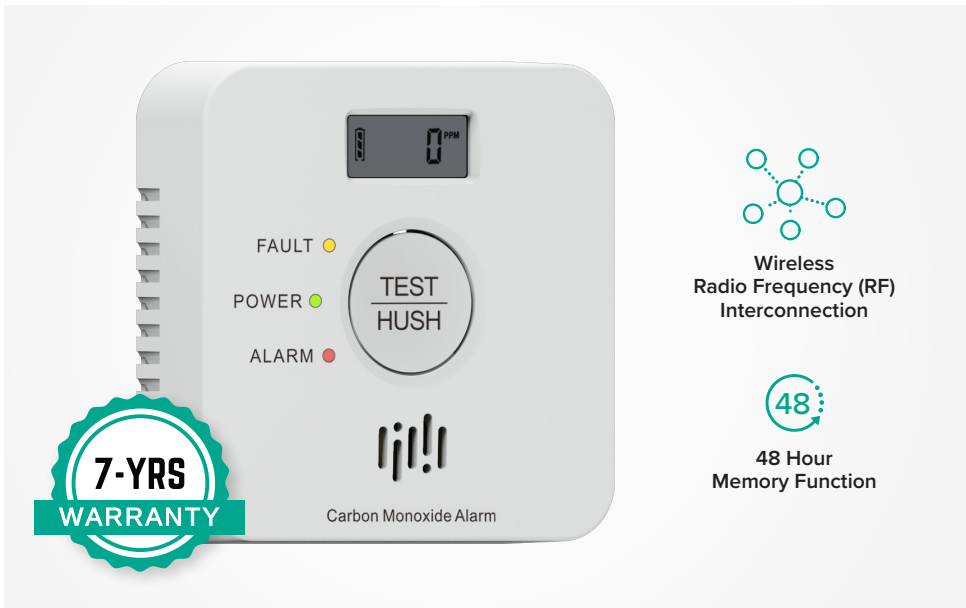

# CARBON MONOXIDE ALARM

## WITH BUILT-IN RF MODULE

Emerald's Carbon Monoxide Alarm features a built-in RF module for easy integration with other Emerald RF alarms in the home, enhancing overall safety. With a 48-hour memory function, it simplifies the identification of faulty alarms, increasing protection against carbon monoxide hazards.

This apparatus is designed to protect individuals from the acute effects of carbon monoxide exposure. It will not fully safeguard individuals with specific medical conditions. If in doubt consult a medical practitioner.

The battery in this unit is intended to last it's 7 year service life and cannot be replaced.

### INCREASE YOUR PROTECTION

Receive alerts from your Emerald radio frequency (RF) smoke alarm network anytime, anywhere with SafeLink via your phone and the Emerald app.

### FEATURES

- Built-in RF module
- 48 hour memory function
- Ceiling or wall mount
- Fault and low battery warning
- Easy install
- Hush function
- Complies with EN50291-1:2018



### SPECIFICATIONS

<b>MODEL NUMBER</b>	EP-CO-RF-07
<b>DIMENSIONS</b>	93 x 93 x 27.1mm
<b>WEIGHT</b>	109.2g
<b>WARRANTY</b>	7 Years
<b>WIRELESS DISTANCE</b>	>20m (100m outside)

<b>POWER - BATTERY</b>	7 year non-replaceable 3V lithium battery
<b>MOUNTING OPTIONS</b>	Ceiling or wall mount
<b>INTERCONNECT</b>	Built-in wireless radio frequency (RF) technology Connects with up to 40 Emerald RF enabled alarms
<b>SENSOR</b>	Electrochemical technology
<b>SOUND PATTERN</b>	ISO 8201
<b>ALARM VOLUME</b>	>85dB(A) @ 3m
<b>NORMAL OPERATING &amp; STORAGE TEMPERATURE</b>	-10°C to 40°C
<b>NORMAL OPERATING &amp; STORAGE HUMIDITY</b>	15% to 93% relative humidity (non-condensing)
<b>COMPATIBILITY</b>	RF carbon monoxide alarm is compatible with - • Emerald's radio frequency (RF) enabled alarms • Emerald SafeLink Wi-Fi gateway • Smoke Alarm Controller

